


BUILDING B

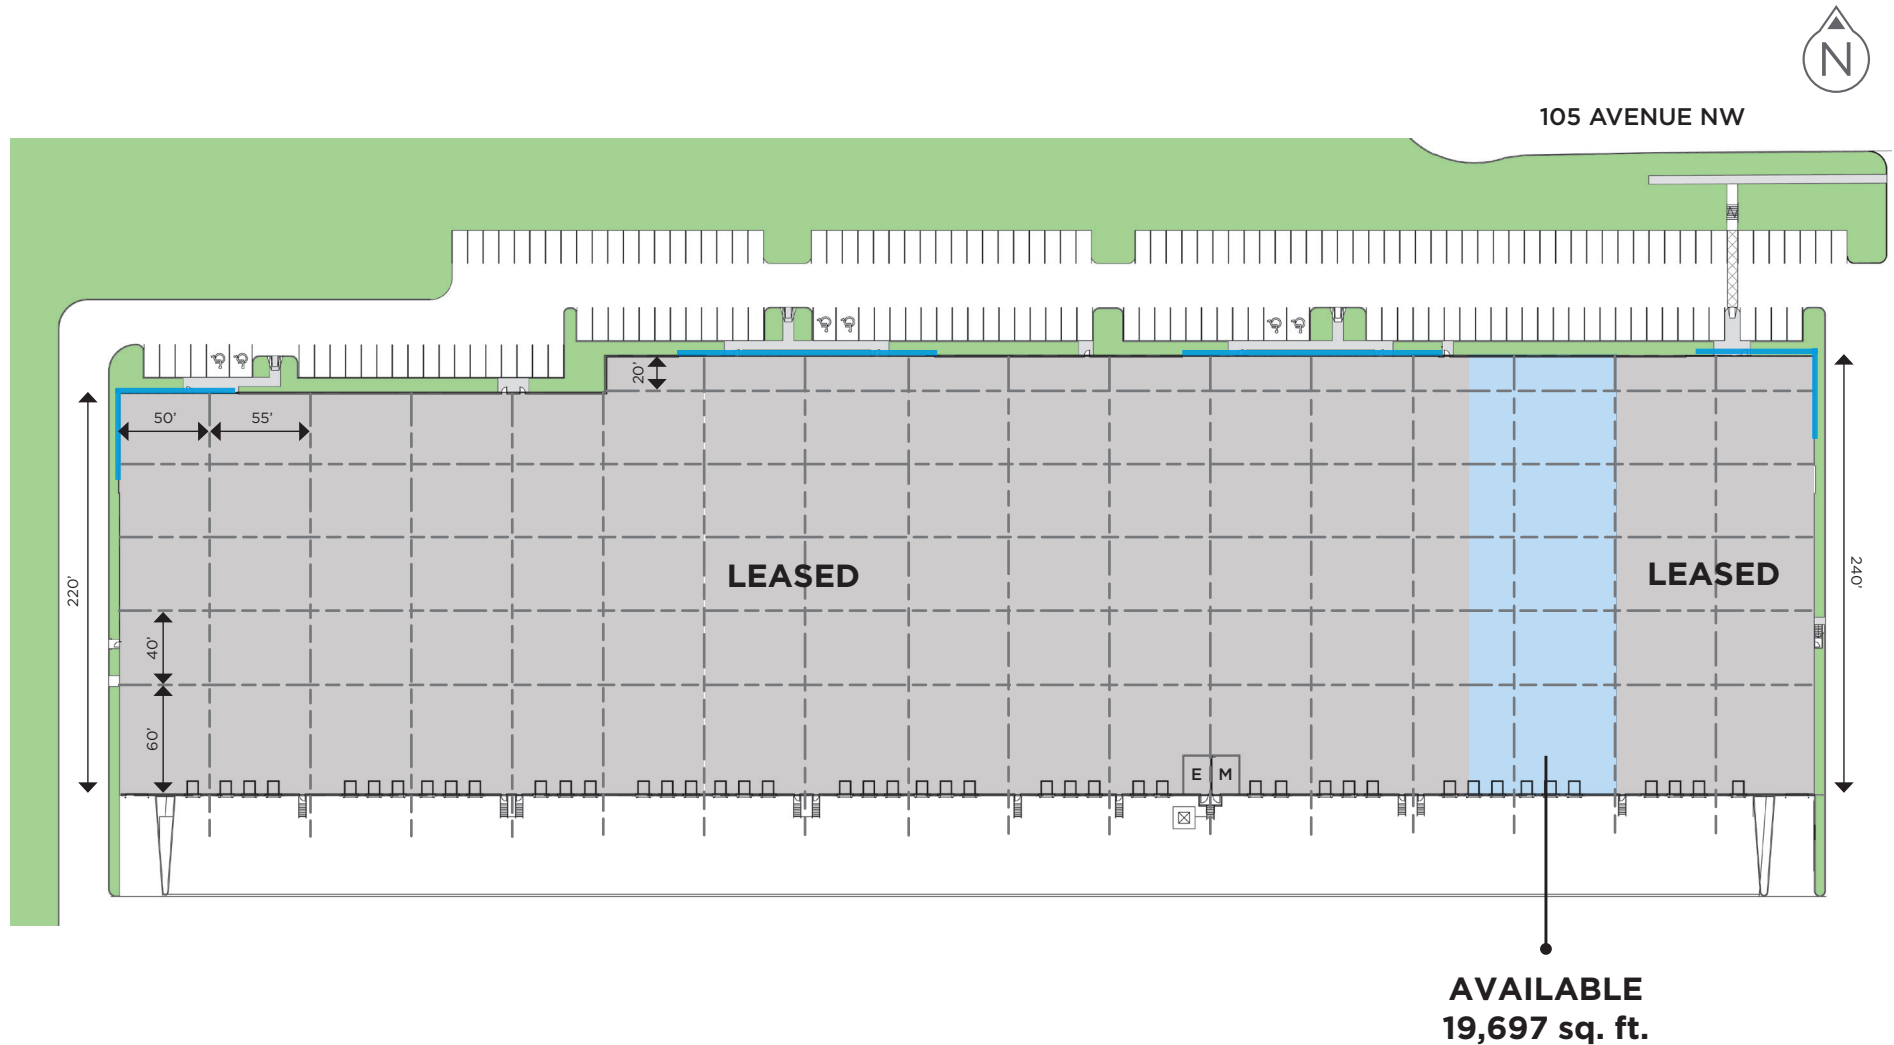

Blue line indicates extent of storefront glass.

18505-69 - 105 Avenue NW
Total Building Area: 216,896 sq. ft.

FEATURES

- 17,103 sq. ft. minimum tenant size
- +/- 11,039 sq. ft. bay sizes
- 28 ft. clear height
- 55 ft. x 60 ft. marshalling bays
- ESFR sprinkler system
- 10,000 lb. racking point load
- T5 high output lighting
- Multiple drive-in door capability
- 45 dock doors with levellers (three per bay)
- 40,000 lb. pneumatic dock levellers
- Medium Industrial (IM) Zone

- Site**
- 55 ft. concrete dock loading aprons
 - 55 ft. concrete-grade door ramps
 - Heavy-duty asphalt shared truck court
 - 173 parking stalls available

- Slab, Walls and Roof**
- 220-240 ft. building depth
 - 40 ft. x 50 ft. grid or 40 ft. x 55 ft. grid
 - 60 ft. deep marshalling bays
 - 50 in. dock height
 - 7 in. steel-fibre reinforced concrete slab on grade
 - Ashford Formula concrete sealer
 - Sanitary sewer lines along front of building and rear bay
 - No cross-bracing below 10 ft. in warehouse interior
 - Embossed, non-combustible metal composite wall panels
 - Ballasted EPDM membrane roofing
 - 40,000 lb., 7 ft. x 8 ft. pneumatic dock levellers
 - Floor designed for an allowable rack load per rack leg of 10,000 lbs.

- Electrical**
- 2000 amp, 347/600 Volt 3 Phase 4 wire
 - T5 HO lighting with average of 30 fc of lighting

- Mechanical**
- Gas-fired unit heaters
 - Programmable thermostats with humidity-sensing capability zoned effectively for comfort
 - Full ESFR sprinkler system for racking to 24 ft.

- Windows and Doors**
- Two-storey, curtain-wall glazing at office locations
 - 5 ft. x 5 ft. punched rear windows (one per bay)
 - 5 in. x 22 in. view lites on overhead doors
 - All glazing with Low-E coating
 - 12 ft. x 14 ft. grade doors with electric operators
 - 9 ft. x 10 ft. manual, vertical lift overhead dock doors complete with truck seals and bumpers